

**fischer** 

**FIS V Zero.**

Maximum safety for  
people and nature.



**Zero hazard**  
technology





# The universal mortar without hazardous substance labelling.



FIS V Zero 300 T

FIS V Zero 360 S

## Your advantages at a glance

- The innovative formula of the universal mortar FIS V Zero is free of labelling-required hazardous substances, such as dibenzoyl peroxide, which is classified as sensitising, irritating to the eyes and hazardous to the environment.
- The non-labelled ingredients of the FIS V Zero guarantee safe installation for maximum user protection.
- The injection mortar is approved for anchoring in concrete and masonry, for post-installed rebar connections and for water-filled drill holes.
- The possible installation temperatures of -10 to 40 °C allow the universal use of FIS V Zero all year round.
- Used cartridges can be disposed of environmentally friendly in the residual waste and thus avoids cost-intensive hazardous waste.

## Approvals



ETA-20/0572, for cracked concrete  
ETA-20/0574, for post-installed  
rebar connections  
ETA-21/0267, for masonry and aerated concrete



# Performance features at a glance.

## Special formulation



### Revolutionary formula for safe application:

Through the replacement of dibenzoyl peroxide and other substances classified as environmentally hazardous, sensitising and eye-irritating hazardous substances, the FIS V Zero does not require any labelling of hazardous substances nor the corresponding safety data sheet.

## Water-filled drill holes



### Can be used in all weather conditions:

FIS V Zero can be easily installed in water-filled drill holes in concrete according to ETA and can therefore be used under all building conditions.

## Recycling Advantage



### Optimized and recycled packaging:

The first fischer cartridge, that consists of more than 50% post-consumer recyclates (PCR) and a recycled label.

## Installation temperatures



### Well prepared for every season:

The possible installation temperatures of -10 to 40 °C allow the universal use of FIS V Zero all year round. In addition, an internal expert report confirms installation temperatures of up to -15 °C.

## Highest work safety



### Maximum user protection in every situation:

Thanks to its non-labelled ingredients, the FIS V Zero offers its users maximum protection during processing and achieves the lowest emission class with the A+ rating.


## Post-installed rebar connections



### Maximum safety for rebars:

Post-installed rebar connections complete the range of possible applications of FIS V Zero and make the injection mortar the perfect choice on the construction site.

## Maximum nature protection



### Innovative ingredients for more nature protection:


Significantly reduced environmental risk even with improper disposal thanks to the innovative ingredients. The simple disposal in the residual waste avoids the usual costly disposal as hazardous waste.






# fischer PRO. The mobile fixing expert.

[www.fischer-international.com](http://www.fischer-international.com)

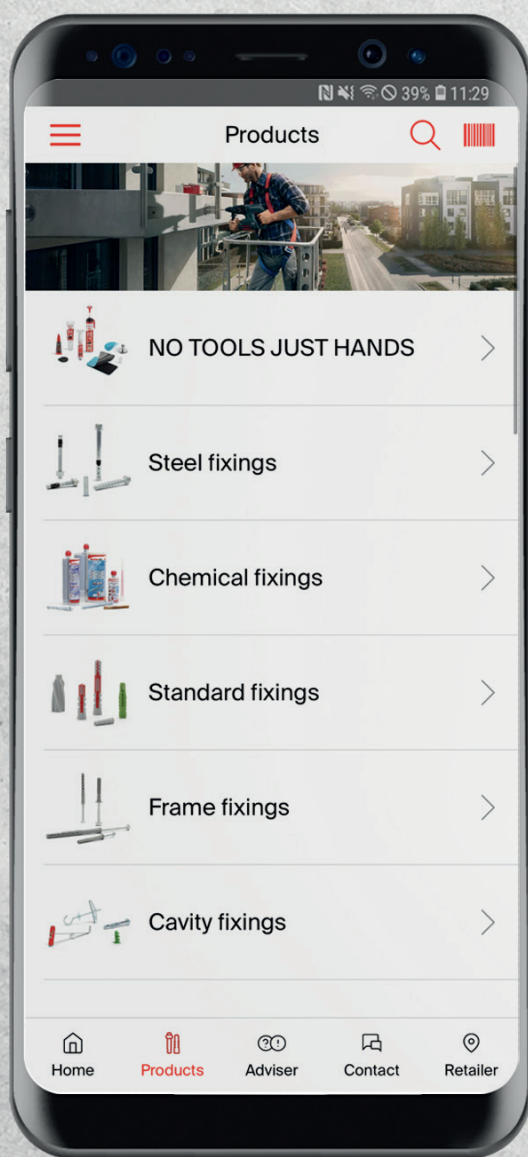




# Application in cracked and uncracked concrete.

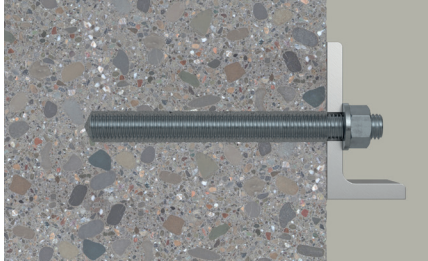


## fischer anchor rod FIS A or RG M

- Diameters M8 - M24 in uncracked and cracked concrete
- Available as zinc-plated steel 5.8 and 8.8 as well as stainless steel R
- Anchorage depth 60 - 480 mm

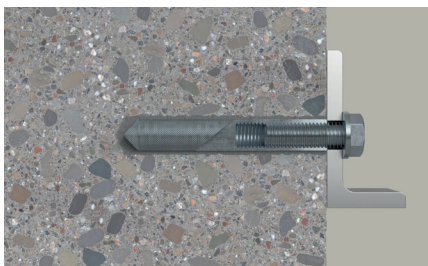


## fischer internal threaded anchor RG M I

- Diameters M8 - M16 in uncracked and cracked concrete
- Available as zinc-plated steel and stainless steel R
- Anchorage depth 90 - 160 mm

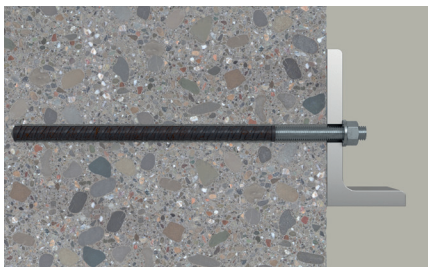


## fischer rebar anchor FRA

- Reinforcing steel with connection thread made of stainless steel for uncracked concrete
- Connection threads M12 - M24
- Embedment depth up to 480 mm

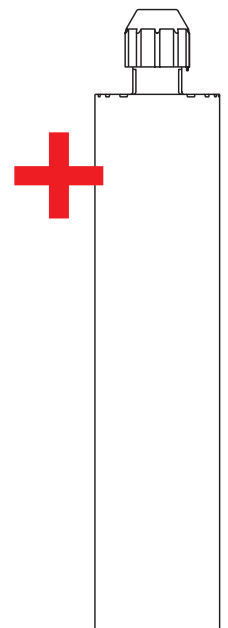


Injection mortar FIS V Zero

## Exemplary installation in concrete with FIS V Zero and FIS A / RG M

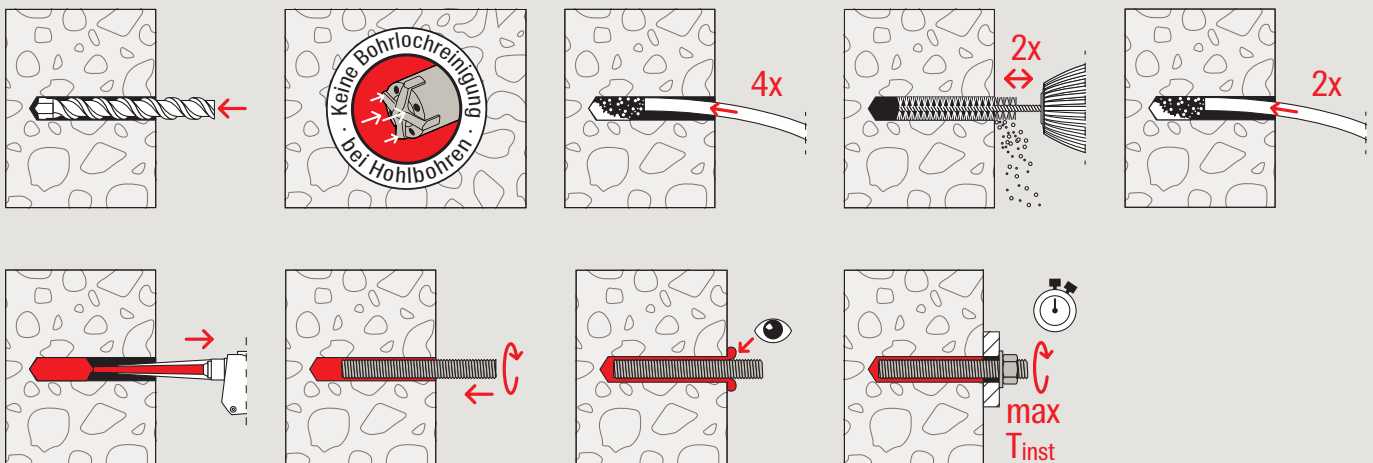




# Application in solid masonry and aerated concrete.

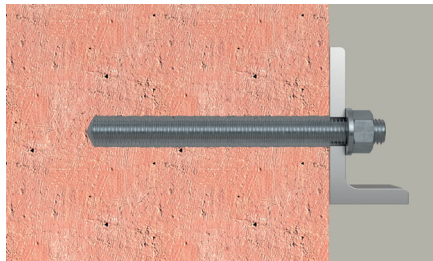


## fischer anchor rod FIS A or RG M

- Available as zinc-plated steel in steel grades 5.8 and 8.8 and stainless steel R
- Diameters M8 - M16
- Anchorage depth 50 - 80 mm

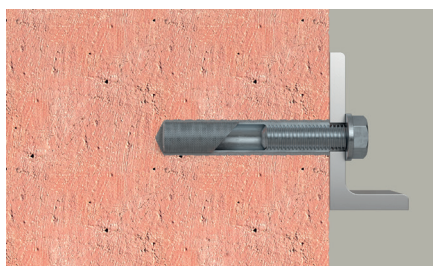


## fischer internal threaded anchor FIS E

- Diameters M8 - M12 available as zinc-plated steel
- Diameters M8 - M10 available as stainless steel R
- Anchorage depth 85 mm

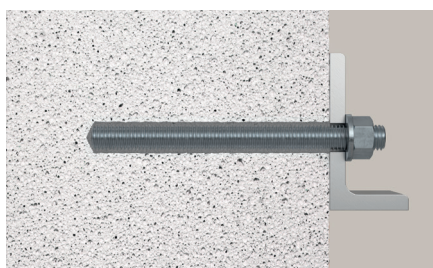


## fischer anchor rod FIS A or RG M

- Available as zinc-plated steel in steel grades 5.8 and 8.8 and stainless steel R
- Diameters M8 - M16
- Anchorage depth 100 mm

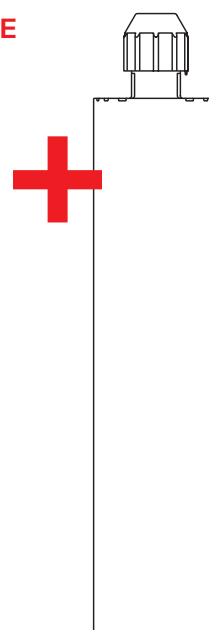

Injection mortar FIS V Zero


## Exemplary installation in solid brick and aerated concrete with FIS V Zero and FIS A

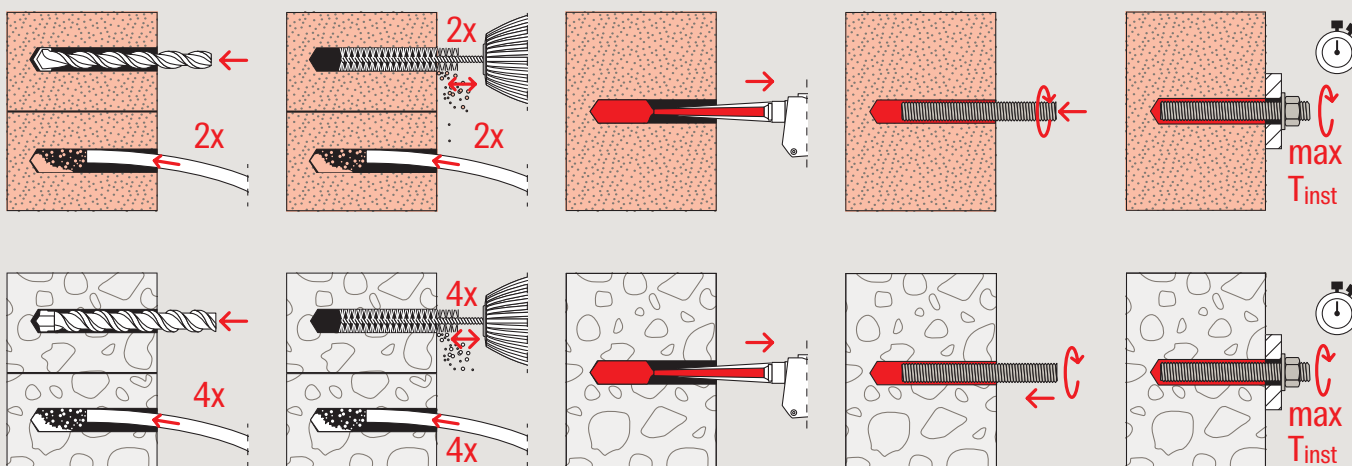




# Application in perforated brickwork.

In various perforated bricks, such as vertically perforated bricks, sand-lime bricks, hollow blocks, etc.

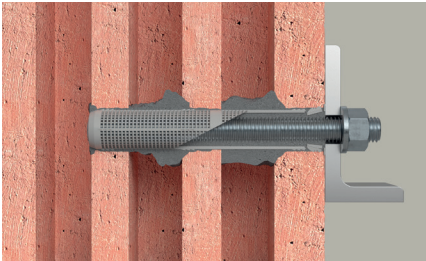


## fischer anchor rod FIS A or RG M

- Diameters M8 - M16
- Available as zinc-plated steel in steel grades 5.8 and 8.8 and stainless steel R
- Anchorage depth 50, 85 and 130 mm

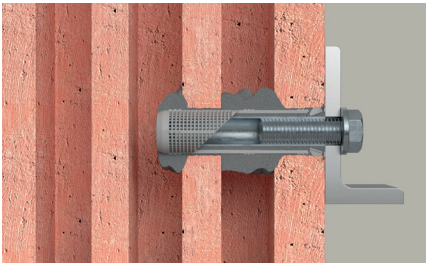


## fischer internal threaded anchor FIS E

- Diameters M8 - M12 available as zinc-plated steel
- Diameters M8 - M10 available as stainless steel R
- Anchorage depth 85 mm

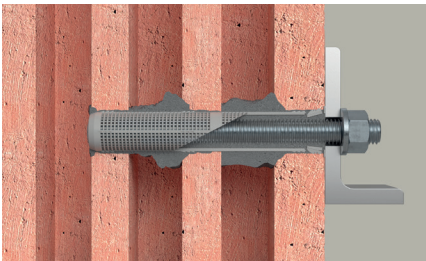


## fischer anchor sleeve FIS H K

- Anchor sleeves Ø 12, 16 and 20 for anchor rods M8 - M16 or internal threaded anchor M8 - M12
- Anchorage depth 50, 85 and 130 mm

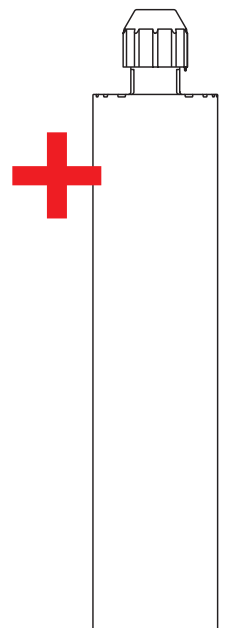

Injection mortar FIS V Zero

## Exemplary installation in preforated brick with FIS V Zero and FIS HK + FIS A+ FIS A

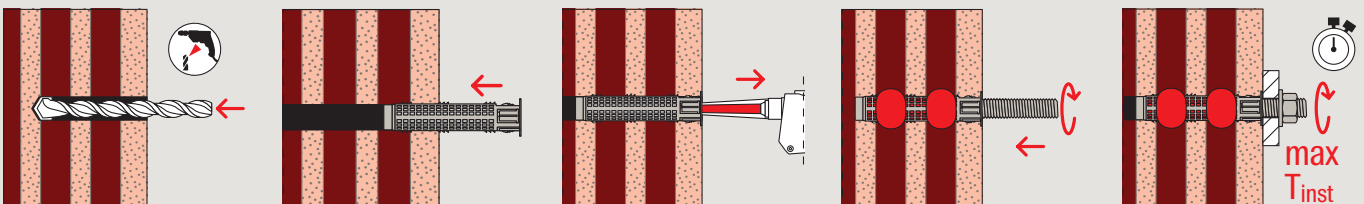



# Compatible anchoring elements.



fischer anchor rods FIS A / RG M zinc-plated steel grade 5.8 and 8.8



fischer anchor rods FIS A / RG M stainless steel R

## Anchor rods

- The fischer FIS A and RG M anchor rods are approved for use in concrete with FIS V Zero in sizes M8 - M24 made of zinc-plated and stainless steel R.
- For use in masonry, the fischer anchor rods FIS A and RG M are approved in sizes M8 - M16 made of zinc-plated and stainless steel R. In perforated brickwork only in combination with the anchor sleeve FIS H K in diameters 12 - 20.
- The variable anchoring depths allow optimum adaptation to the application and load requirements in masonry.

## Internally threaded anchor

- The internally threaded anchor RG M I is approved for use in concrete in the sizes M8 - M16 made of zinc-plated and stainless steel. The FIS E made of zinc-plated and stainless steel R is approved for use in masonry in sizes M8 - M12 (stainless steel R M8 and M10).
- In combination with metric screws or threaded rods the RG M I / FIS E can be used for the installation of removable fixings.

## Anchor sleeves

- The grid structure of the FIS H K anchor sleeve ensures economical mortar consumption with optimum form fit.
- The centring wings ideally align the fixing element in the anchor sleeve and allow the use of different anchor rod diameters.

## Rebar anchor

- The rebar anchor FRA is a rebar with metric connection thread made of stainless steel in the sizes M12 - M24.
- It fully utilises the load-bearing capacity of the concrete.
- This allows very high tensile loads to be introduced into the anchoring base.



fischer internal threaded anchor FIS E zinc-plated / stainless steel R



fischer internal threaded anchor RG M I zinc-plated / stainless steel R



**Anchor sleeve FIS H K**  
Injection anchor sleeve for perforated brickwork.



**fischer rebar anchor FRA**  
Reinforcing bar with metric thread made of stainless steel.



# The battery dispenser for professionals.



## The advantages at a glance

- The dosing function enables the efficient adjustment of the mortar quantity to match the drill hole size.
- The dispensing speed can be adjusted to the application via a controller.
- The detachable handle and belt hook ensure particularly ergonomic use.
- The sturdy design of the device guarantees reliable and long-lasting processing under demanding building site conditions.
- The 18V technology provides for the necessary dispensing power. Furthermore, the battery is compatible with all Cordless Alliance System (CAS) power tools and chargers worldwide.

## More information:

[www.fischer-international.com/dispenser](http://www.fischer-international.com/dispenser)





# Applications


## Fixings in inhabited rooms



## Steel constructions

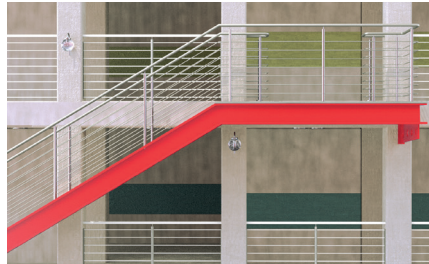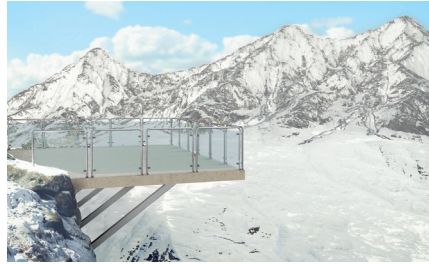

## Rebar connections

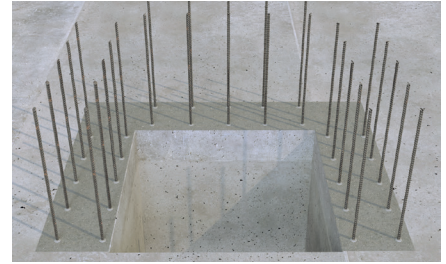

# Assortment and Loads

## Injection mortar FIS V Zero



FIS V Zero 300 T

FIS V Zero 360 S

FIS V Zero 150 C

FIS V Zero 300 T BT

FIS V Zero 300 T coolbox

FIS V Zero 300T HWK K

Item	Item No.	Approval ETA	Languages on the cartridge	Contents	Sales unit [pcs]
FIS V Zero 300 T	562064	●	EN, DA, SE, CS/SK, FI, NO, PL, RO, HU, RU	1 cartridge 300 ml, 2 x FIS MR Plus with transparent Clip	10
FIS V Zero 300 T	558953	●	DE, EN, NL, FR, IT, ES, PT	1 cartridge 300 ml, 2 x FIS MR Plus with transparent Clip	10
FIS V Zero 360 S	558954	●	DE, EN, FR, ES, PT, PL, HU	1 cartridge 360 ml, 2 x FIS MR Plus	6
FIS V Zero 150 C	574542	●	DE, EN, FR, IT, ES, PT	1 cartridge 150ml, 1x FIS MR Plus	3
FIS V Zero 150 C	575603	●	SV, DA, NO, FI, PL, RO, HU	1 cartridge 150ml, 1x FIS MR Plus	3
FIS V Zero 150 C M8	574543	●	DE, EN, FR, IT, ES, PT	1 cartridge 150ml, 1x FIS MR Plus, 4x M8 110mm	3
FIS V Zero 300 T (EN) BT	574814	●	EN, DA, SE, CS/SK, FI, NO,RO,PL ,HU, RU	20 cartridges 300ml, 40x FIS MR Plus	1
FIS V Zero 300 T (EN) coolbox	574815	●	EN, DA, SE, CS/SK, FI, NO,RO,PL ,HU, RU	12 cartridges 300ml, 24x FIS MR Plus	1
FIS V Zero 300 T (DE) BT	574540	●	DE, EN, NL, FR, IT, ES, PT	20 cartridges 300ml, 40x FIS MR Plus	1
FIS V Zero 300 T (DE) coolbox	574541	●	DE, EN, NL, FR, IT, ES, PT	12 cartridges 300ml, 24x FIS MR Plus	1
FIS V Zero 300T HWK K	569050	●	DE, EN, FR, IT, ES, PT	10 cartridges 300ml, 20x FIS MR Plus	1

# Assortment and Loads

## Curing times

FIS V Zero Temperature at anchoring base [°C]	Maximum processing time $t_{work}$ [hrs.]		Minimum curing time <sup>1)</sup> $t_{cure}$ [hrs.]	
	[hrs.]	[min.]	[hrs.]	[min.]
-10 – -5 <sup>2)</sup>	6	–	72	–
> -5 – 0 <sup>2)</sup>	2	–	24	–
> 0 – +5 <sup>2)</sup>	–	45	12	–
> +5 – +10	–	20	6	–
> +10 – +15	–	8	3	–
> +15 – +20	–	5	2	–
> +20 – +25	–	3	1	–
> +25 – +30	–	2	–	45
> +30 – +40	–	1	–	30

<sup>1)</sup> In wet concrete or water-filled holes the curing times must be doubled.

<sup>2)</sup> Minimum cartridge temperature +5 °C.

### Injection system FIS V Zero with internal threaded anchor RG M I

Permissible loads of a single anchor<sup>1) 2)</sup> in normal concrete of strength class C20/25.

For the design the complete current assessment ETA-20/0572 has to be considered.

Type	Screw material <sup>3)</sup>	Effective anchorage depth $h_{ef}$ [mm]	Minimum member thickness $h_{min}$ [mm]	Maximum installation-torque $T_{inst,max}$ [Nm]	Cracked concrete Permissible tension ( $N_{perm}$ ) and shear loads ( $V_{perm}$ ); minimum spacing ( $s_{min}$ ) and edge distances ( $c_{min}$ ) with reduced loads				Uncracked concrete Permissible tension ( $N_{perm}$ ) and shear loads ( $V_{perm}$ ); minimum spacing ( $s_{min}$ ) and edge distances ( $c_{min}$ ) with reduced loads			
					$N_{perm}^{4)}$ [kN]	$V_{perm}^{4)}$ [kN]	$s_{min}^{4)}$ [mm]	$c_{min}^{4)}$ [mm]	$N_{perm}^{4)}$ [kN]	$V_{perm}^{4)}$ [kN]	$s_{min}^{4)}$ [mm]	$c_{min}^{4)}$ [mm]
RG M8 I	5.8	90	120	10	5.2	5.3	40	40	8.7	5.3	40	40
	8.8	90	120	10	5.2	8.3	40	40	8.7	8.3	40	40
	R-70	90	120	10	5.2	5.9	40	40	8.7	5.9	40	40
RG M10 I	5.8	90	130	20	6.2	8.3	45	45	11.5	8.3	45	45
	8.8	90	130	20	6.2	13.3	45	45	11.5	13.3	45	45
	R-70	90	130	20	6.2	9.3	45	45	11.5	9.3	45	45
RG M12 I	5.8	125	170	40	9.6	12.1	55	55	18.0	12.1	55	55
	8.8	125	170	40	9.6	19.3	55	55	18.0	19.3	55	55
	R-70	125	170	40	9.6	13.5	55	55	18.0	13.5	55	55
RG M16 I	5.8	160	210	80	13.2	22.4	65	65	26.3	22.4	65	65
	8.8	160	210	80	13.2	30.9	65	65	26.3	30.9	65	65
	R-70	160	210	80	13.2	25.1	65	65	26.3	25.1	65	65

<sup>1)</sup> Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of  $\gamma_L = 1.4$  are considered. As a single anchor counts e.g. an anchor with a spacing  $s \geq 3 \times h_{ef}$  and an edge distance  $c \geq 1.5 \times h_{ef}$ . Accurate data see ETA.

<sup>2)</sup> The specified loads are valid for anchorages in dry and damp concrete. For temperatures in the anchoring substrate up to 50 °C (resp. short term up to 80 °C). Drill hole cleaning as per specification in the ETA. The factor  $\Psi_{sus}$  for sustained load was taken into account with 1.0.

<sup>3)</sup> Further steel grades, versions and technical data see ETA, e.g. for dry internal conditions, galvanised steel (gvz); for damp interiors and for outdoor use, stainless steel (R).

<sup>4)</sup> In the case of combinations of tension and shear loads, bending moments with reduced or minimum spacing and edge distances (anchor groups), the design must be carried out in accordance with the provisions of the complete ETA and the provisions of the EN 1992-4:2018. We recommend using our anchor design software C-FIX.



## Injection system FIS V Zero with threaded rod FIS A

Permissible loads of a single anchor<sup>1) 2)</sup> in normal concrete of strength class C20/25.  
For the design the complete current assessment ETA-20/0572 has to be considered.

Type	Material/ surface <sup>3)</sup>	Effective anchorage depth	Minimum member thickness	Maximum installation- torque	Cracked concrete				Uncracked concrete			
					Permissible tension ( $N_{perm}$ ) and shear loads ( $V_{perm}$ ); minimum spacing ( $s_{min}$ ) and edge distances ( $c_{min}$ ) with reduced loads				Permissible tension ( $N_{perm}$ ) and shear loads ( $V_{perm}$ ); minimum spacing ( $s_{min}$ ) and edge distances ( $c_{min}$ ) with reduced loads			
		$h_{ef}$ [mm]	$h_{min}$ [mm]	$T_{inst,max}$ [Nm]	$N_{perm}^{4)}$ [kN]	$V_{perm}^{4)}$ [kN]	$s_{min}^{4)}$ [mm]	$c_{min}^{4)}$ [mm]	$N_{perm}^{4)}$ [kN]	$V_{perm}^{4)}$ [kN]	$s_{min}^{4)}$ [mm]	$c_{min}^{4)}$ [mm]
FIS A M 8	5.8	60	100	10	2.1	5.7	40	40	5.1	6.3	40	40
	5.8	80	110	10	2.7	6.3	40	40	6.8	6.3	40	40
	5.8	160	190	10	5.5	6.3	40	40	9.0	6.3	40	40
	R-70	60	100	10	2.1	5.7	40	40	5.1	6.0	40	40
	R-70	80	110	10	2.7	6.0	40	40	6.8	6.0	40	40
	R-70	160	190	10	5.5	6.0	40	40	9.9	6.0	40	40
FIS A M 10	5.8	60	100	20	2.6	7.2	45	45	6.4	9.7	45	45
	5.8	90	120	20	3.8	9.7	45	45	9.6	9.7	45	45
	5.8	200	230	20	8.5	9.7	45	45	13.8	9.7	45	45
	R-70	60	100	20	2.6	7.2	45	45	6.4	9.2	45	45
	R-70	90	120	20	3.8	9.2	45	45	9.6	9.2	45	45
	R-70	200	230	20	8.5	9.2	45	45	15.7	9.2	45	45
FIS A M 12	5.8	70	100	40	3.6	10.1	55	55	9.0	14.3	55	55
	5.8	110	140	40	5.6	14.3	55	55	14.1	14.3	55	55
	5.8	240	270	40	12.3	14.3	55	55	20.5	14.3	55	55
	R-70	70	100	40	3.6	10.1	55	55	9.0	13.7	55	55
	R-70	110	140	40	5.6	13.7	55	55	14.1	13.7	55	55
	R-70	240	270	40	12.3	13.7	55	55	22.5	13.7	55	55
FIS A M 16	5.8	80	120	60	5.5	15.3	65	65	12.0	26.9	65	65
	5.8	125	170	60	8.5	23.9	65	65	21.4	26.9	65	65
	5.8	320	360	60	21.9	26.9	65	65	37.6	26.9	65	65
	R-70	80	120	60	5.5	15.3	65	65	12.0	25.2	65	65
	R-70	125	170	60	8.5	23.9	65	65	21.4	25.2	65	65
	R-70	320	360	60	21.9	25.2	65	65	42.0	25.2	65	65
FIS A M 20	5.8	90	140	120	7.7	21.5	85	85	14.3	40.0	85	85
	5.8	170	220	120	14.5	40.7	85	85	34.5	42.3	85	85
	5.8	400	450	120	34.2	42.3	85	85	58.6	42.3	85	85
	R-70	90	140	120	7.7	21.5	85	85	14.3	39.4	85	85
	R-70	170	220	120	14.5	39.4	85	85	34.5	39.4	85	85
	R-70	400	450	120	34.2	39.4	85	85	65.7	39.4	85	85
FIS A M 24	5.8	96	160	150	9.8	27.6	105	105	15.7	44.1	105	105
	5.8	210	270	150	21.5	60.3	105	105	45.8	60.6	105	105
	5.8	480	540	150	49.2	60.6	105	105	84.3	60.6	105	105
	R-70	96	160	150	9.8	27.6	105	105	15.7	44.1	105	105
	R-70	210	270	150	21.5	56.8	105	105	45.8	56.8	105	105
	R-70	480	540	150	49.2	56.8	105	105	94.3	56.8	105	105

<sup>1)</sup> Design according to EN 1992-4:2018 (for static resp. quasi-static loads). The partial safety factors for material resistance as regulated in the ETA as well as a partial safety factor for load actions of  $\gamma_L = 1.4$  are considered. As a single anchor counts e.g. an anchor with a spacing  $s \geq 3 \times h_{ef}$  and an edge distance  $c \geq 1.5 \times h_{ef}$ . Accurate data see ETA.

<sup>2)</sup> The specified loads are valid for anchorages in dry and damp concrete. For temperatures in the anchoring substrate up to 50 °C (resp. short term up to 80 °C). Drill hole cleaning as per specification in the ETA. The factor  $\Psi_{sus}$  for sustained load was taken into account with 1.0.

<sup>3)</sup> Further steel grades, versions and technical data see ETA, e.g. for dry internal conditions, galvanised steel (gvz); for damp interiors and for outdoor use, stainless steel (R).

<sup>4)</sup> In the case of combinations of tension and shear loads, bending moments with reduced or minimum spacing and edge distances (anchor groups), the design must be carried out in accordance with the provisions of the complete ETA and the provisions of the EN 1992-4:2018. We recommend using our anchor design software C-FIX.

# Loads

## Injection system FIS V Zero with threaded rod FIS A in solid and perforated masonry

Permissible loads<sup>1,2)</sup> for a single anchor in masonry for pre-positioned installation.  
For the design the complete valid European Technical Assessment ETA-21/0267 has to be considered.

	Com- pressive brick trength	Brick raw density	Minimum brick dimensions <sup>3)</sup>	Effec- tive an- chorage depth	Mini- mum member thick- ness	Max- imum installa- tion torque	Permis- sible tensile load <sup>4)</sup>	Permissi- ble shear load <sup>4)</sup>	Minimum- spacing <sup>5)</sup>	Character- istic resp. minimum edge distance <sup>5)</sup>
Type	$f_b$ [N/mm <sup>2</sup> ]	$\rho$ [kg/dm <sup>3</sup> ]	(L x W x H) [mm]	$h_{ef}$ [mm]	$h_{min}$ [mm]	$T_{inst,max}$ [Nm]	$N_{perm}$ [kN]	$V_{perm}$ [kN]	$s_{min} \parallel / s_{min} \perp$ [mm]	$c_{cr} = c_{min}$ [mm]
<b>Solid brick Mz, acc. to EN 771-1</b>										
M8	≥ 36	≥ 2.0	230 x 108 x 55	50	108	10	0.43	0.71	100 / 100	100
M10	≥ 36	≥ 2.0	230 x 108 x 55	80	110	10	0.57	1.29	100 / 100	100
M12	≥ 48	≥ 2.0	230 x 108 x 55	80	110	10	0.71	1.43	100 / 100	100
M16	≥ 36	≥ 2.0	230 x 108 x 55	80	110	10	1.00	1.29	100 / 100	100
M16	≥ 48	≥ 2.0	230 x 108 x 55	80	110	10	1.14	1.43	100 / 100	100
<b>Solid sand-lime brick KS, acc. to EN 771-2</b>										
M8	≥ 12	≥ 2.0	240 x 115 x 71	80	115	8	0.43	1.00	100 / 100	100
M10	≥ 12	≥ 2.0	240 x 115 x 71	80	115	10	0.86	1.29	100 / 100	100
M12	≥ 12	≥ 2.0	240 x 115 x 71	80	115	10	0.86	1.14	100 / 100	100
M16	≥ 12	≥ 2.0	240 x 115 x 71	80	115	10	0.43	1.14	100 / 100	100
<b>Vertically perforated brick Hlz, acc. to EN 771-1<sup>3)</sup></b>										
M8 with FIS H 12 x 85 K	≥ 16	≥ 1.6	230 x 108 x 55	85	115	5	0.43	1.43	100 / 60	100
M8 / M10 with FIS H 16 x 130 K	≥ 16	≥ 1.6	230 x 108 x 55	130	160	5	0.71	1.43	100 / 60	100
M12 / M16 with FIS H 20 x 130 K	≥ 16	≥ 1.6	230 x 108 x 55	130	160	5	0.71	1.43	100 / 60	100
<b>Perforated sand-lime brick KSL, acc. to EN 771-2<sup>3)</sup></b>										
M8 with FIS H 12 x 85 K	≥ 16	≥ 1.6	240 x 175 x 113	85	175	8	0.34	1.00	100 / 100	100
M8 / M10 with FIS H 16 x 130 K	≥ 16	≥ 1.6	240 x 175 x 113	130	175	8 / 10	1.00	1.14	100 / 100	100
M12 / M16 with FIS H 20 x 85 K	≥ 16	≥ 1.6	240 x 175 x 113	85	175	10	0.43	1.86	100 / 100	100
<b>Lightweight concrete hollow block Hbl, acc. EN 771-3<sup>3)</sup></b>										
M8 / M10 with FIS H 16 x 85 K	≥ 2	≥ 1.0	500 x 200 x 200	85	200	2	0.09	0.43	100 / 100	100
M12 / M16 with FIS H 20 x 130 K	≥ 4	≥ 1.0	500 x 200 x 200	130	200	2	0.17	0.57	100 / 100	100

<sup>1)</sup> The required partial safety factors for material resistance as well as a partial safety factor for load actions of  $\gamma_L = 1.4$  are considered. Load values are valid for zinc-plated steel gvz, stainless steel R and highly corrosion-resistant steel HCR. In perforated bricks and hollow blocks threaded rod FIS A in combination with anchor sleeve FIS H K.

<sup>2)</sup> The given loads are valid for installation and use of fixations in dry masonry - use category d/d - for temperatures in the substrate up to 50 °C (resp. short term up to 80 °C) and drill hole cleaning according to assessment. The given brick types in combination with the permissible loads are an extract of the assessment.

<sup>3)</sup> More information about, e.g. hole patterns, assortment of anchor sleeves FIS H K see assessment.

<sup>4)</sup> In the case of combinations of tensile and shear loads, bending moments and reduced edge and axial spacings (anchor groups), the design must be carried out in accordance with the provisions of the complete assessment.

<sup>5)</sup> Minimum feasible spacing resp. edge distance. Details as well as to the distances to joints see assessment.



# FIS V Zero

## in aerated concrete.

	Com- pressive strength	Brick raw density	Minimum brick dimen- sions	effective anchor- age depth	minimum member thickness	max. in- stallation torque	permis- sible tension load	Permis- sible shear load <sup>4)</sup> $c_{min}$	Permis- sible shear load <sup>4)</sup> $c_{cr}$	Minimum spacing <sup>5)</sup>	Minimum edge dis- tance <sup>5)</sup>	Charac- teristic edge dis- tance <sup>5)</sup>
	$f_b$	$\rho$	(LxWxH)	$h_{ef}$	$h_{min}$	$T_{inst,max}$	$N_{perm}$	$V_{perm}$	$V_{perm}$	$s_{min} \parallel$ / $s_{min-L}$	$c_{min}$	$c_{cr}$
Type	[N/mm <sup>2</sup> ]	[kg/dm <sup>3</sup> ]	[mm]	[mm]	[mm]	[Nm]	[kN]	[kN]	[kN]	[mm]	[mm]	[mm]
Aerated concrete acc. To EN771-4 <sup>6)</sup>												
Porenbeton PP2 M8	2	0,35	–	100	130	2	0,32	0,43	0,89	100/100	100	250
	M10	2	0,35	–	100	2	0,32	0,43	0,89	100/100	100	250
	M12	2	0,35	–	100	2	0,43	0,43	0,89	100/100	100	250
	M16	2	0,35	–	100	2	0,53	0,43	0,89	100/100	100	250
Porenbeton PP4 M8	4	0,5	–	100	130	2	0,32	0,43	0,89	100/100	100	250
	M10	4	0,5	–	100	2	0,32	0,43	0,89	100/100	100	250
	M12	4	0,5	–	100	2	0,43	0,43	0,89	100/100	100	250
	M16	4	0,5	–	100	2	0,53	0,43	0,89	100/100	100	250
Porenbeton PP6 M8	6	0,65	–	100	130	2	0,32	0,43	0,89	100/100	100	250
	M10	6	0,65	–	100	2	0,32	0,43	0,89	100/100	100	250
	M12	6	0,65	–	100	2	0,43	0,43	0,89	100/100	100	250
	M16	6	0,65	–	100	2	0,53	0,43	0,89	100/100	100	250


<sup>2)</sup> The given loads are valid for installation and use of fixations in dry masonry - use category d/d - for temperatures in the substrate up to 50 °C (resp. short term up to 80 °C) and drill hole cleaning according to assessment. The given brick types in combination with the permissible loads are an extract of the assessment.

<sup>3)</sup> More information about, e.g. hole patterns, assortment of anchor sleeves FIS H K see assessment.

<sup>4)</sup> In the case of combinations of tensile and shear loads, bending moments and reduced edge and axial spacings (anchor groups), the design must be carried out in accordance with the provisions of the complete assessment.

<sup>5)</sup> Minimum feasible spacing resp. edge distance. Details as well as to the distances to joints see assessment.

<sup>6)</sup> Cylindrical drill hole.



**FiXperience**

# FiXperience. Safe and reliable.

The fischer design Software FiXperience gives you safe and reliable support in dimensioning your projects whether you are a planer, structural engineer or craftsman. FiXperience is set up modularly

and useable for a variety of applications. The program includes an engineering software with special application modules:



## C-FIX

The anchor design program for steel and bonded anchor in concrete, as well as injection systems for masonry. Now with the new FEM design tool for the realistic design of anchorages.



## MORTAR-FIX

To determine the injection resin volume for bonded anchors in concrete and masonry.



## WOOD-FIX

For the calculation of on-rafter insulation systems and joints in structural timber engineering.



## RAIL-FIX

For the design of fixings for railings on reinforced concrete slabs and staircases.




## INSTALL-FIX

For the design and dimensioning of MEP installation systems.



## FACADE-FIX

For the design of façade fixings with timber sub-structure.



## REBAR-FIX

For the design of post-installed rebars in reinforced concrete.



## CHANNEL-FIX

For the design of cast-in channels and inserts.



## SOLARPANEL-FIX

For the design and dimensioning of mounting systems for photovoltaic panels.

Register on the **myfischer portal** to use **FiXperience online** or download **FiXperience** for free.



Dealer:

[www.fischer-international.com](http://www.fischer-international.com)



**fischer stands for**

Fixing Systems  
fischertechnik  
Consulting  
Electronic Solutions

---

fischerwerke GmbH & Co. KG  
Klaus-Fischer-Straße 1 · 72178 Waldachtal  
Germany  
T +49 7443 12 - 0  
[www.fischer-international.com](http://www.fischer-international.com) · [info@fischer.de](mailto:info@fischer.de)

---